



PURCHASED ITEMS

KEY	DESCRIPTION	QTY.	U/M	INV. CODE	VENDOR NAME	PART/MODEL NUMBER	PART TYPE
1	1/4"-20 HEX NUT SS W/PLASTIC	24	EA	BI	MISC	250-20_HEXNUT	PART
2	1/4"-20 X 1 1/2" STUD BOLT	24	EA	BI	MISC	1_4-20_STUD	PART



DROP IN TOP : 16 GA. STN/STL ALL WELDED CONSTRUCTION. CREASE DRAINBOARD 3/16"

SINK : 16 GA. STN/STL ALL WELDED CONSTRUCTION. ALL HORIZONTAL AND VERTICAL CORNERS TO BE A 3/4" RADIUS.


NOTES: ALL STN/STL TO BE TYPE 300 SERIES.
ALL STN/STL TO BE POLISHED TO A NO. 3 FINISH.
ALL UNEXPOSED WELDS TO BE COVERED w/ ALUMINUM PAINT.
ALL METAL EDGES AND CORNERS TO BE FILED SMOOTH.

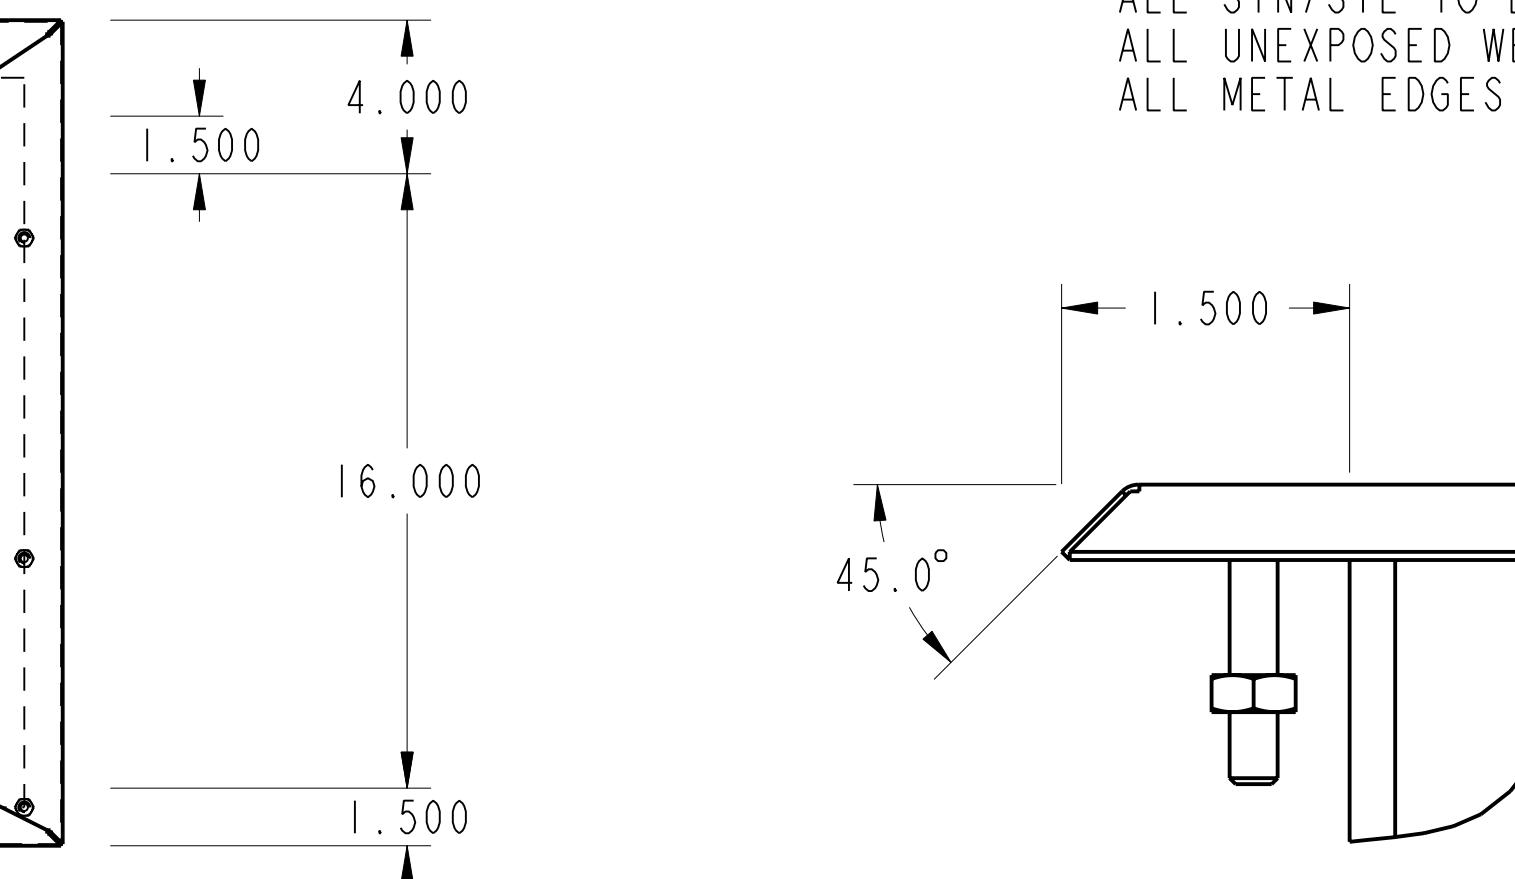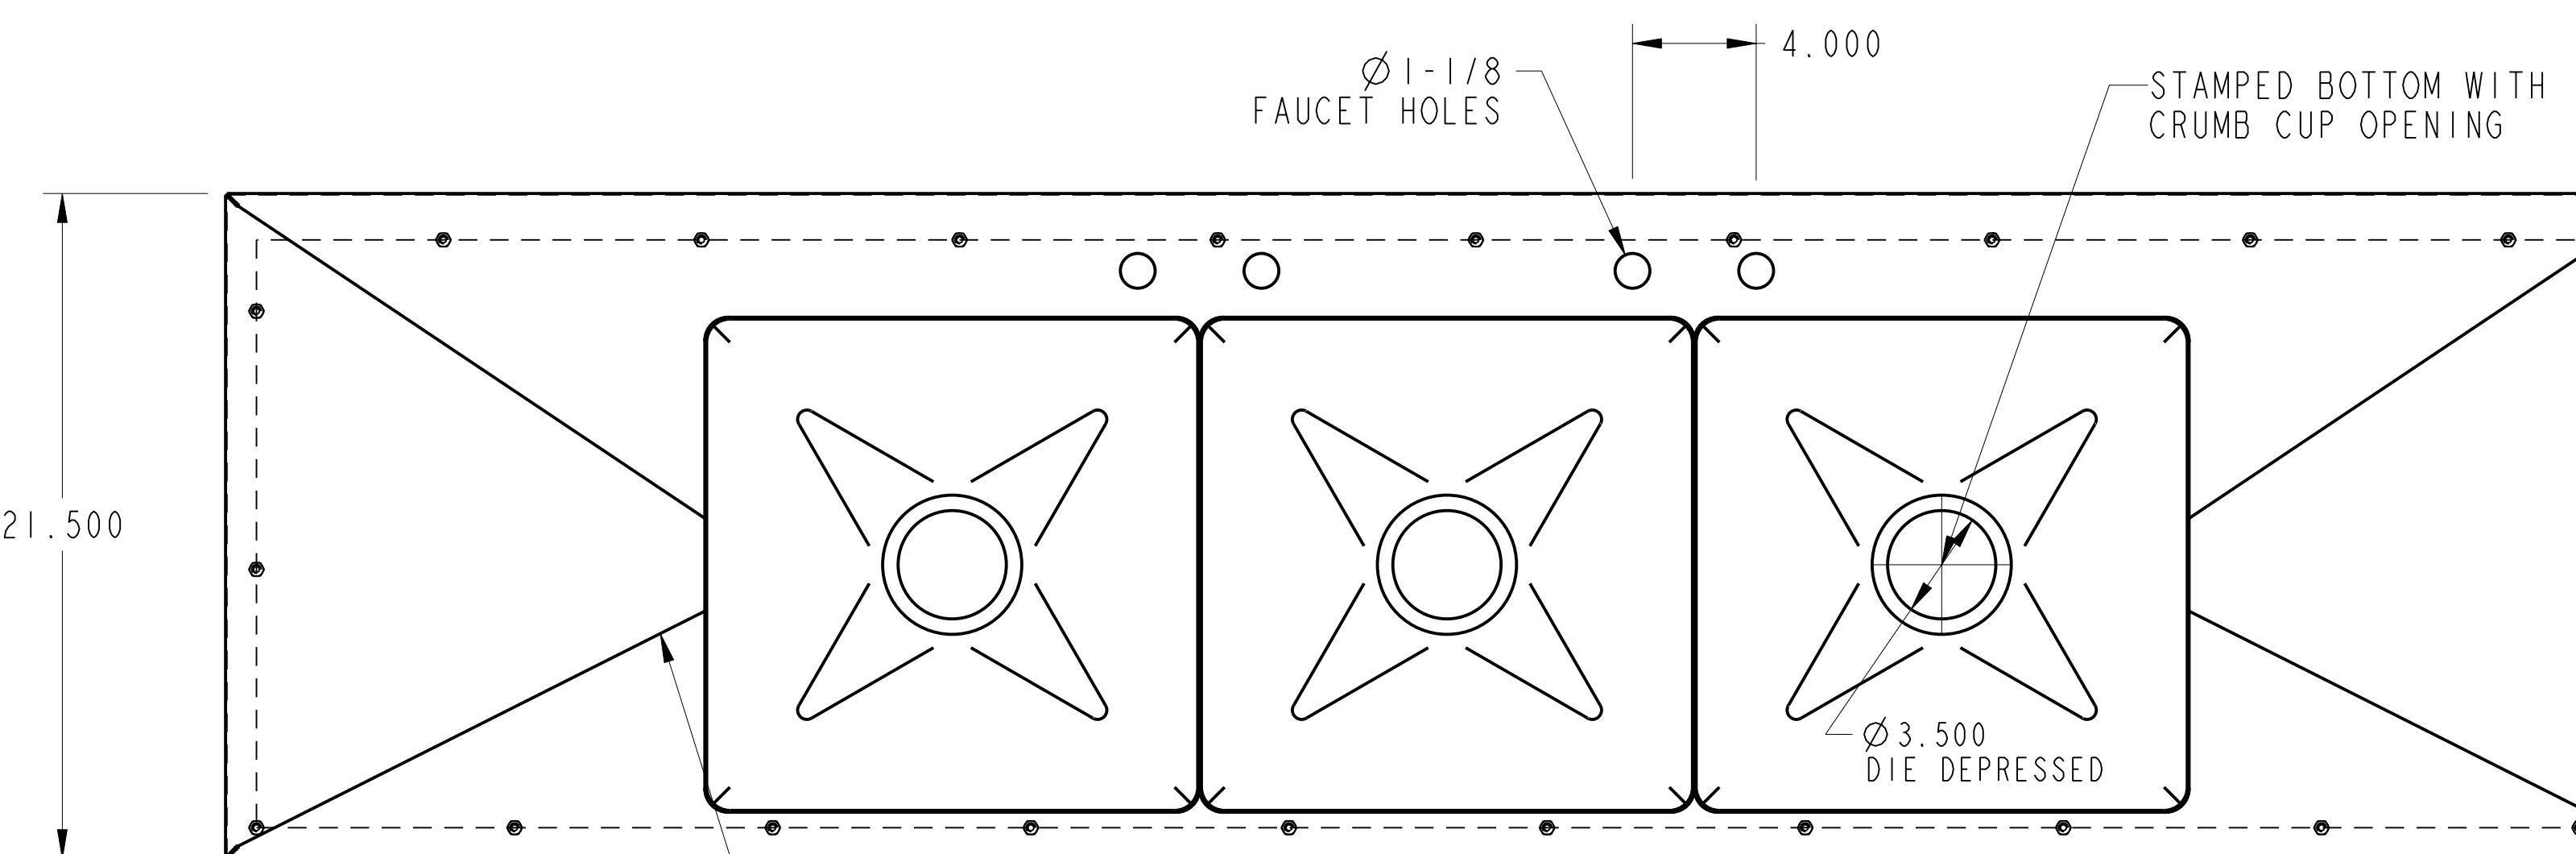

DETAIL A
SCALE 1.000

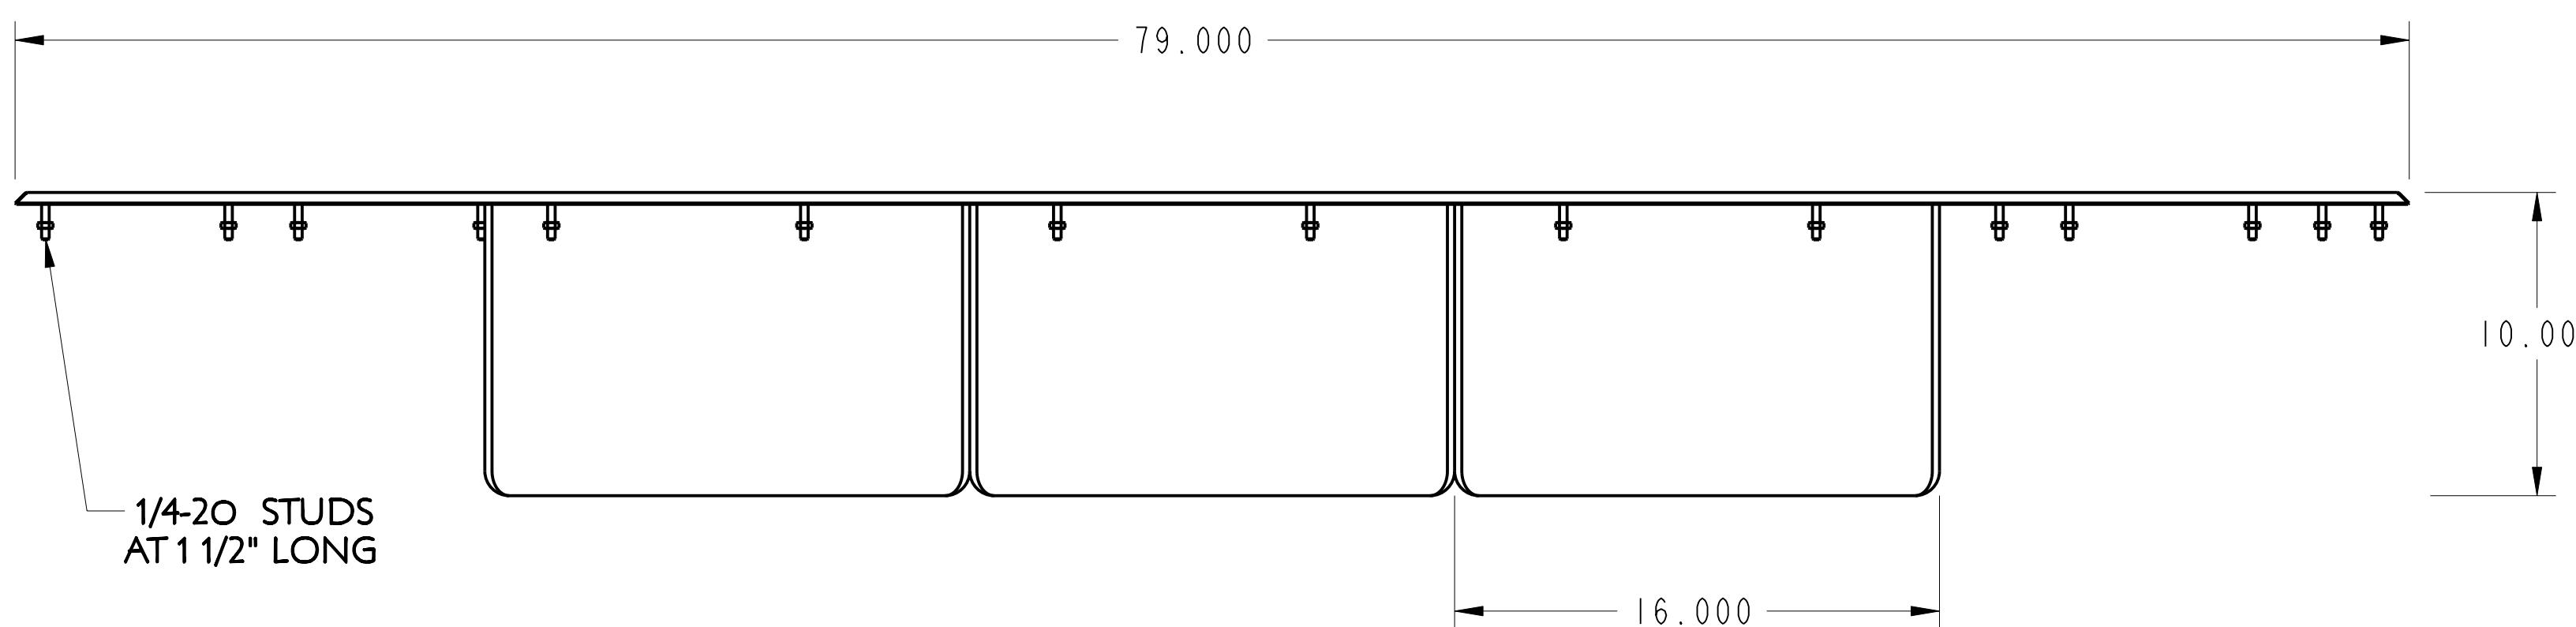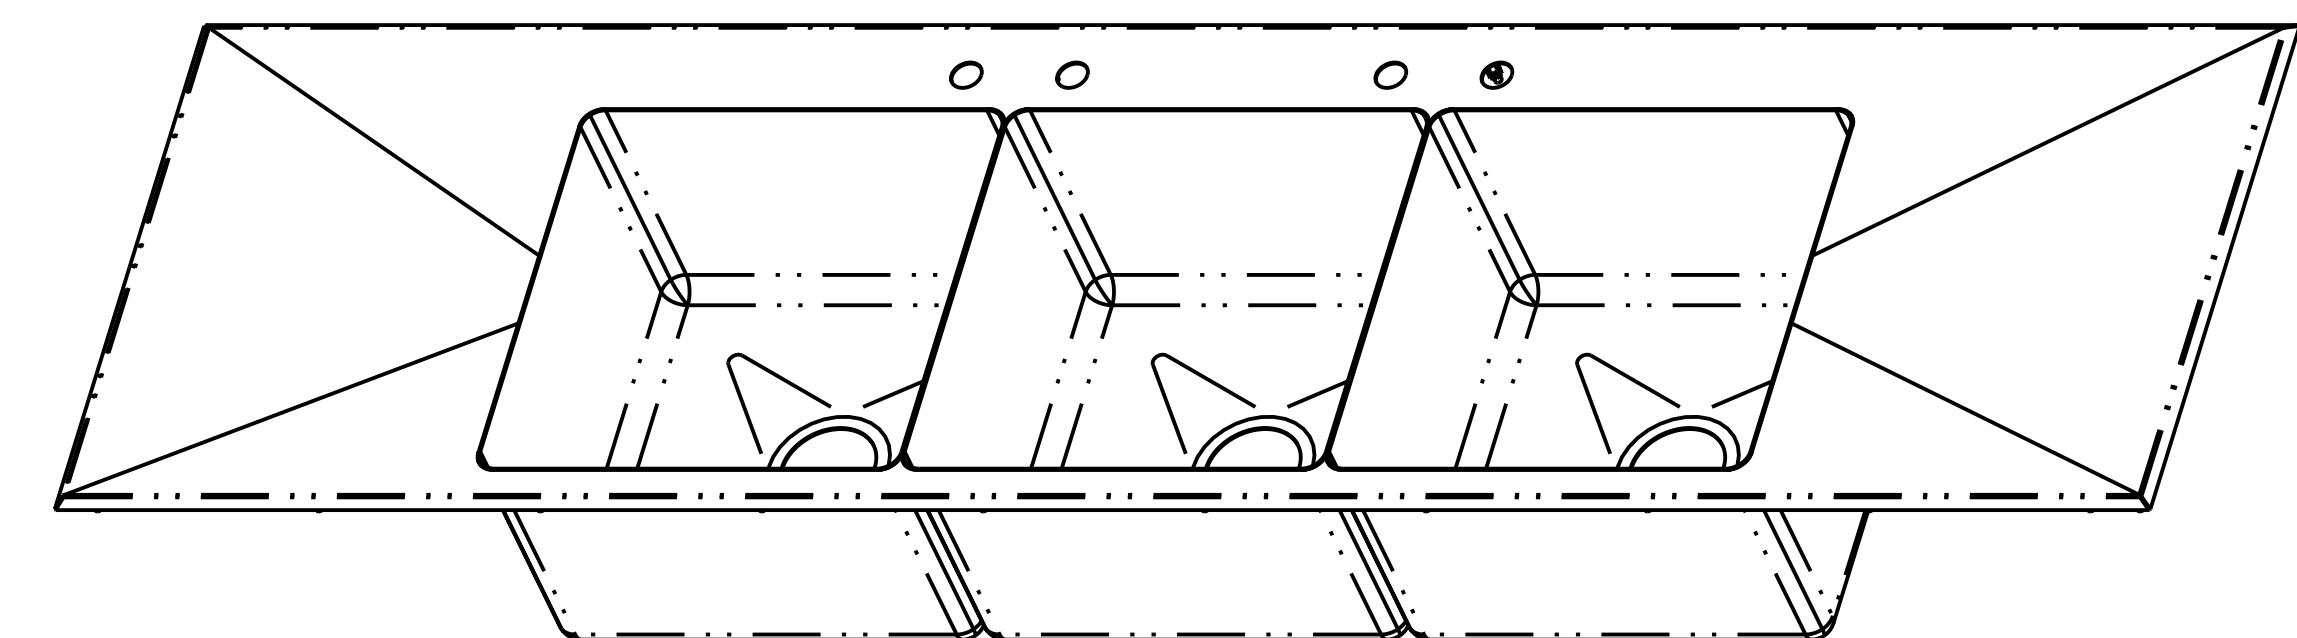

FRONT ELEVATION

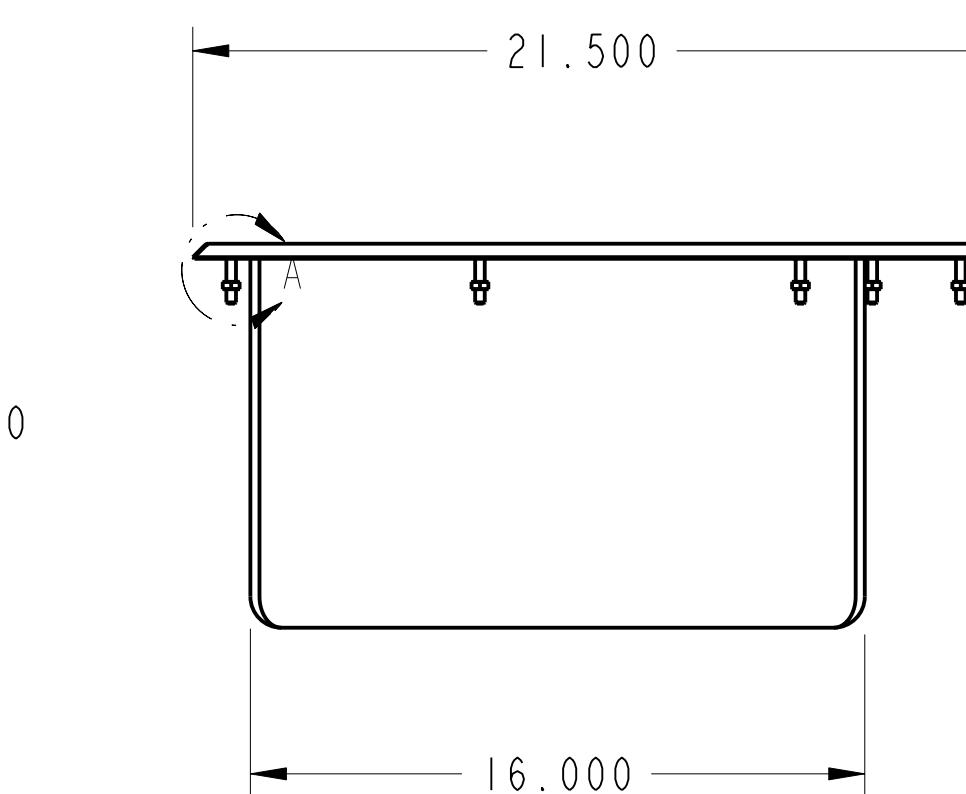

NO.	DATE	REVISIONS	BY
ASSEM	DWDD-3-1616-10-15_5D		



PRO

THIS DRAWING IS THE PROPERTY OF AMTEKCO INDUSTRIES INC. AND IS TO REMAIN IN THE POSSESSION OF OUR REPRESENTATIVE UNLESS PERMISSION IS GIVEN BY AMTEKCO INDUSTRIES INC. AND MUST BE RETURNED WHEN REQUESTED.

AMTEKCO INDUSTRIES

THREE COMPARTMENT DROP IN SINK W/DRAIN BOARD (DWDD-3-1616-10-15.5D)

APPROVED BY	CKD BY	DATE 06-Oct-06	SCALE 0.200
		DRAWN BY GANESH	1 of 1
		DATE	CODE
		DRAWING No. DWDD-3-1616-10-15.5D	REV. PART/SHEET